

Qwizdom® STUDENT REMOTE

Q# 008

Q#: Displays the current question number.

✓ X

Right/Wrong Indicator: Lets you know if your response is correct (check), incorrect (x) or received (both).

MENU

Menu/Power: Hold down for 2 seconds to turn remote on or off. Press to view menu options. Here you can enter your student ID or a different session ID.

Send

Send: Press to submit answer, or select menu item.

Decimal

Decimal: Press between two numbers to indicate a decimal.

ID# 0037

ID#: Displays the remote number. You will be assigned a remote number automatically as you log in.

Battery Power

Battery Power: If symbol appears it indicates little or no life left on the battery.

C

Clear: Press to delete the last character or change answer.

Left/Right

Left/Right: Press to navigate between menu options, answer choices & question numbers.

Fraction

Fraction: Press between two numbers to indicate a fraction.

Minus

Minus: Press to indicate a negative number.

Q4 RF

Using the Q4 Remote

The following are some helpful hints to get you started with your new Q4:

How do I know what version of remote I have?

When you turn on your remote it will display the version number for 3 seconds. This may be important to know if you ever have any technical problems.

How do I enter a "Session ID" or "User ID" ?

Your remote may automatically ask for the "Session ID" or "User ID." Simply enter in the number and hit "Send." To re-enter or enter it manually, press "MENU", use directional arrows to scroll over to either "Sess. ID" or "User ID," and press "Send". Enter in the new number and press "Send" again.

Remote Messages

- **No Net:** Remote cannot find the network. Re-enter the session number. If this does not work re-enter user ID and session ID.
- **Find Net:** Remote is searching for the network.
- **Low Batt:** Batteries need to be replaced.
- **Loading:** Loading an answer key.
- **Push Key:** Remote is idle. Awaken by pressing any key
- **Qwizdom:** Ready for a question.
- **Denied:** Student can't log in due to an incorrect or duplicate ID number. Re-enter "User ID" and the "Session ID."
- **Inactive:** Remote senses a host that is not in use or doesn't recognize that there is a session in progress. If remote remains inactive after starting a presentation, re-enter "Session ID."
- **Activity ID:** An activity ID must be entered because multiple answer keys are being used with a paper-based test. This number should be printed on the top of the test.

Qwizdom® INSTRUCTOR REMOTE



Clear: Press to delete your selection, hide response bar, or display the order of students' responses.



Power: Slide to turn on/off remote power.




Send: Press to submit command and display session ID during a presentation.



Light: Press to turn on backlight.

Thumb pad: Press right or left to navigate between slide sets. Press up or down to navigate between question and answer slides. Press center button to select menu choices.



Power Jack: Plug your AC adapter into this slot to charge your remote.



Help List: Press to view a list of students who requested help.*



Right/Wrong: Press to mark students correct/incorrect when answering question types not supported by student remotes.*



New Q: Press to pose a spontaneous question.



Menu: Press to view menu options. Here you can enter a different session ID or search again for the host.

Q5 RF

Keypad Buttons



Show: Press to display student groups, scores and remote assignments.



Play: Press to start, pause, or continue an autopilot presentation or video/sound clip.



Function: Press to execute a unique function you create.*



Pick: Press to randomly call on and display a student's name on screen.



LCD Graph: Press to display a graph of results on the Instructor remote's LCD.*



Screen Graph: Press to display a graph of results on screen to entire group.

Spontaneous Questions

During a presentation, you can pose a spontaneous question to test student's knowledge or gather opinions.

To pose a spontaneous question:

- Verbally ask the class a spontaneous question and include possible answer choices.
- On the Instructor remote, hit the *New Q* key.
- Use the Thumb Pad to select a question type and answer.
- Hit the *Send* key.
- After the students have responded, press the *Screen Graph* key on the Instructor remote to pull up a response graph showing how students answered.

*Coming Spring 2006

Qwizdom® STUDENT REMOTE



Q5
RF

Using the Q5 Remote

The following are some helpful hints to get you started with your new Q5:

How do I know what version of remote I have?

When you turn on your remote it will display the version number for 3 seconds. This may be important to know if you ever have any technical problems.

How do I enter a "Session ID" or "User ID"?

Your remote may automatically ask for the "Session ID" or "User ID." Simply enter in the number and hit "Send." To re-enter or enter it manually, press "MENU", use thumb pad to scroll over to "Session ID". Enter in the new number and press "Send." You will then be prompted to enter your user ID. Enter in the new number and press "Send" again.

Remote Messages

- **Not Found:** Remote cannot find the network. Re-enter the session number. If this does not work re-enter user ID and session ID.
- **Finding Host:** Remote is searching for the network.
- **Low Batt:** Batteries need to be recharged.
- **Loading:** Loading an answer key.
- **Push Key:** Remote is idle. Awaken by pressing any key.
- **Remote #:** Ready for a question.
- **Access Denied:** Student can't log in due to an incorrect or duplicate ID number. Re-enter "User ID" and the "Session ID."
- **Not Active:** Remote senses a host that is not in use or doesn't recognize that there is a session in progress. If remote remains inactive after starting a presentation, re-enter "Session ID."
- **Activity ID:** An activity ID must be entered because multiple answer keys are being used with a paper-based test. This number should be printed on the top of the test.

Qwizdom® INSTRUCTOR REMOTE



Remote Setup

Before you can use your remotes you must specify the remote type within the Remotes Options window.

To set up & test remotes:

- Plug the Host into an open USB port.
- Open Qwizdom Interact.
- Click on the *Remotes* button. The Remote Options window will appear.
- Click on the *Change* button.
- Select Q3 Blue with 19 Buttons.
- Check the *Teacher Remote* box if using a teacher remote.
- Under *Student Remotes*, specify the lowest and highest remote numbers used in the set.
- Click on *Test*. The Test Remote window will appear with each remote number listed in a gray box.
- Hit any key on a remote to test it. If the remote is working properly, the box containing the remote number will change the color to blue.
- When you are done, select *Close* to exit the Test Remote window and then click OK.


Spontaneous Questions

During a presentation, you can pose a spontaneous question to test student's knowledge or gather opinions.

To pose a spontaneous question:

- Verbally ask the class a spontaneous question and include possible answer choices.
- On the Instructor remote, hit the '?' key.
- Enter in the correct answer and push *Send*.
- A question mark symbol will appear on screen indicating to students that a spontaneous question has been posed.
- After the students have responded, press the *Delta* key on the Instructor remote to pull up a response graph.

Qwizdom® STUDENT REMOTE

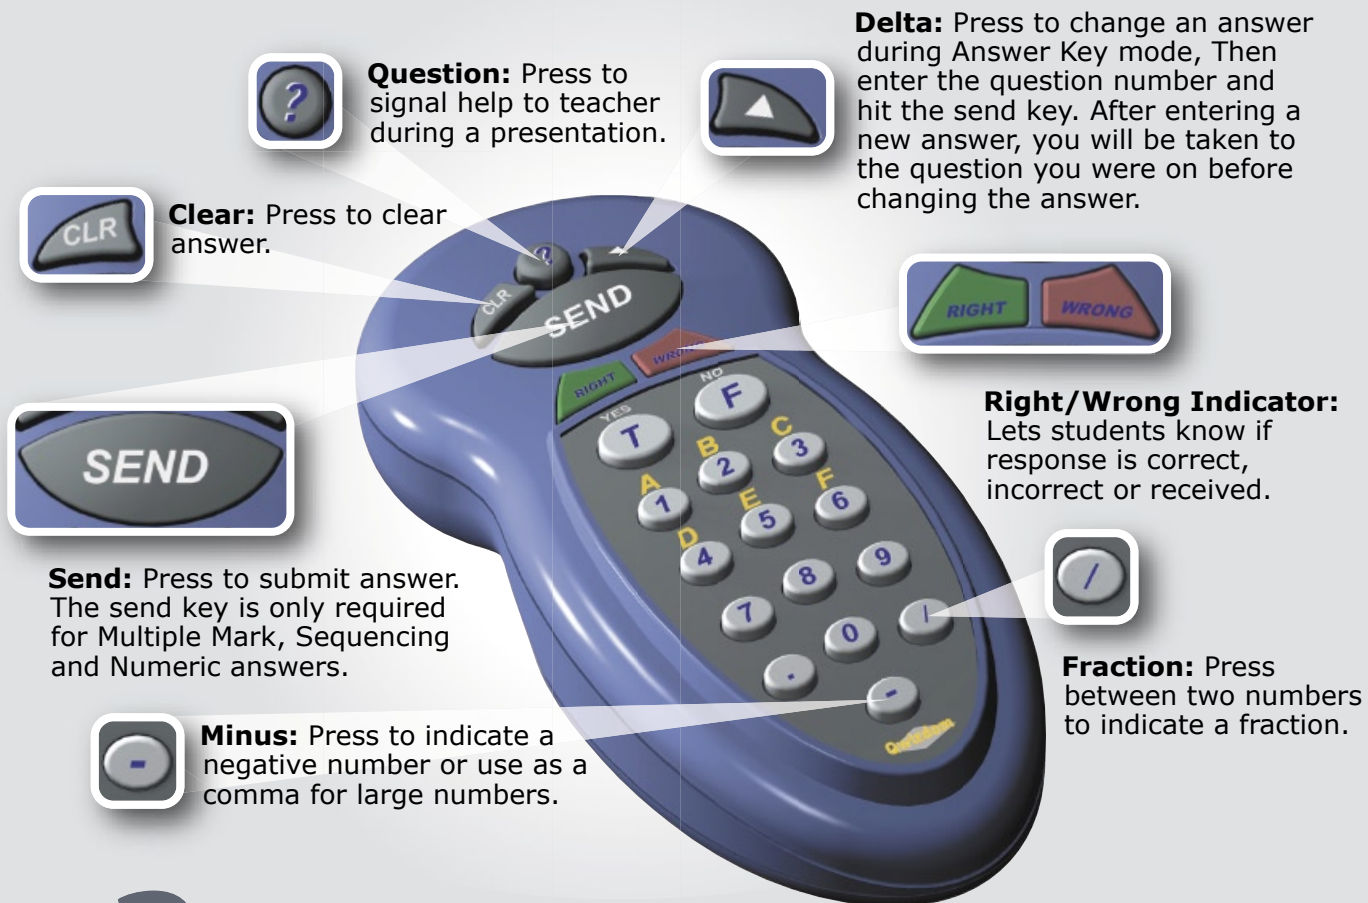

Student Remote Login

Student remote login allows a student to use any remote and sign in without assigning remotes. To have students sign in, each one must have a unique student ID number assigned to their student profile. This option is helpful when you:

- do not have assigned remotes
- have absent students
- have random people using remotes

To log in using student remotes:

- Open Qwizdom Interact and click on the *Content* tab.
- Select an activity and click on the *Present* button. The Presentation Setup window will appear.
- Select the class and check the *Log In by User ID* box under the Remotes section.
- Click *OK* when you are finished setting up the presentation. The Login Screen will appear.
- Have individual students type in their student ID numbers on their remotes and hit the Send key. For example, if a student's number is 043104 he/she will hit 0-4-3-1-0-4 on the remote and then hit the *Send* key to log on. The student's name along with his/her remote number will appear on the Registration Screen.
- If a student keys in the incorrect ID, the student must hit the *Clear* button on his/her remote and then enter the correct student ID.